



PRIMA-VA/FM

Fireman Microphone

PRIMA-VA/FM is a fully monitored fireman microphone designed for EVAC paging. This compact microphone is fitted with a Push-To-Talk button for all call and a XLR 5 pin connector. This fireman microphone is compatible with PRIMA-VA/R and PRIMA-VA/680R.

FEATURES

- Push-To-Talk button for all call
- XLR 5 pin connector

INTERCONNECTIONS

XLR 5 pin connector

CERTIFICATIONS AND APPROVALS

Europe	Voice Alarm	EN54-16
--------	-------------	---------

AUDIO

- Frequency response: ± 5 dB @ 50 ~ 20 kHz
- Sensitivity: -42 ~ -32 dBu

MICROPHONE CHARACTERISTICS

- Type: handheld
- Capsule type: electret condenser
- Polar pattern: omni-directional
- Termination: XLR 5 pin

MECHANICAL

- Dimensions: 60 x 90 x 30 mm
- Weight: 127g
- Colour: red


ENVIRONMENTAL

- Operating temperature: -5 °C ~ 55 °C
- Storage temperature: -40 °C ~ 70 °C
- Relative humidity: 20% to 95% noncondensing


ORDERING INFORMATION

PRIMA-VA/FM: Fireman Microphone

FRONT VIEW

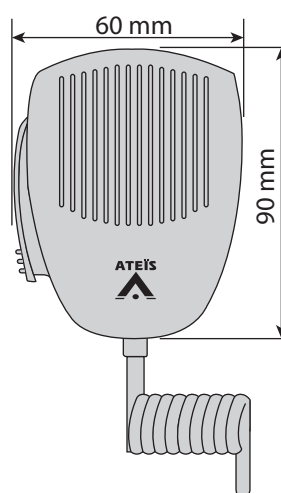

SIDE VIEW

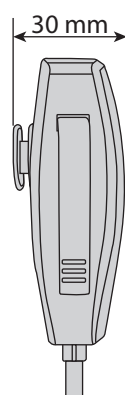

REAR VIEW

